


CUSTOM THREADED SPACERS FOR TEST FIXTURE FABRICATION

THREADED SPACERS

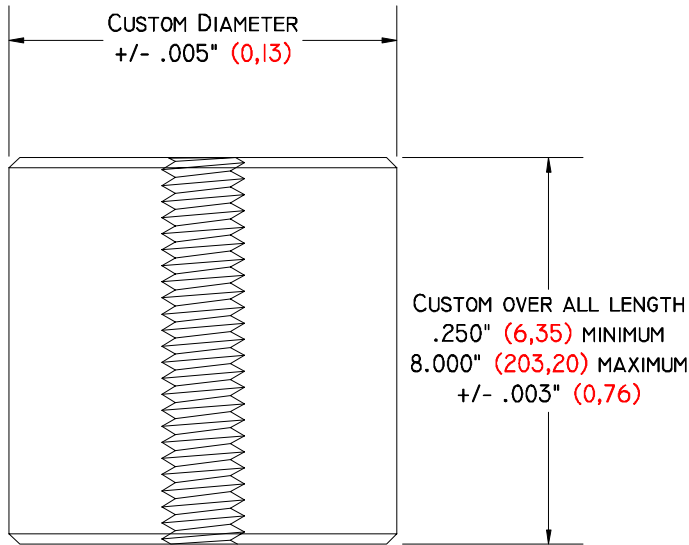

THREADED SPACERS ARE AVAILABLE IN DIAMETERS OF:

1/4" - .250" (6,35) 5/16" - .312" (7,92)

3/8" - .375" (9,53) 1/2" - .500" (12,70)


3/4" - .750" (19,05)

WITH THREAD SIZES OF: 6-32 8-32 10-24 M4 x .7

THREADED SPACERS OVER 1.500" (38,10) IN LENGTH ARE TAPPED TO A DEPTH OF 1.000" (25,40) FROM EACH END.

MATERIAL: SPACER- DELRIN.
INSERTS- BRASS.

SPACERS WITH THREADED BRASS INSERTS

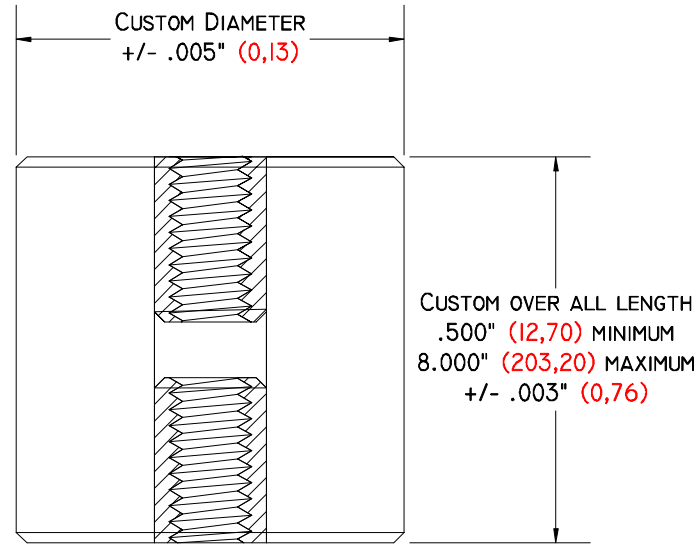

THREADED SPACERS WITH INSERTS ARE AVAILABLE IN DIAMETERS OF:

3/8" - .375" (9,53) 1/2" - .500" (12,70)

3/4" - .750" (19,05)

WITH THREAD SIZES OF: 6-32 8-32 10-24

MINIMUM LENGTH WITH: 6-32 INSERT - .500" (12,70)

8-32 INSERT - .670" (17,02)

10-24 INSERT - .750" (19,05)

PLEASE NOTE THAT THE THREADED INSERTS ARE NOT ALIGNED WITH EACH OTHER, AND ARE DESIGNED TO HAVE A SCREW ENTER FROM EACH END. A SCREW WILL NOT PASS ALL THE WAY THROUGH THE SPACER.

FOR SPACERS WITH INSERTS, ADD (I) TO THE END OF THE PART NUMBER.

TO ORDER, DEVELOP A PART NUMBER USING THE CUSTOM OVER ALL LENGTH, CUSTOM DIAMETER, CUSTOM THREAD SIZE, REQUIRED USING THE MINIMUM / MAXIMUM INFORMATION IN THE ILLUSTRATIONS ABOVE.

EXAMPLE:

GI- 750 - 750 / 6-32 DS

OVER ALL LENGTH ———
DIAMETER ———
THREAD SIZE ———